

Note!

Please note that there can be small differences between your product and the images in these instructions.

Note!

Please note that during storage and transport, especially at high ambient temperature, some of the oil and grease used for assembly may leak and stain the packaging. This will not cause damage to the product, wipe off the excessive oil or grease with a cloth.

Note!

Before you install this product, check the kit contents. If anything is missing, please contact an Öhlins dealer.

Warning!

Before you install this product, read the Öhlins Owner's manual. This product is an important part of the vehicle and the vehicle stability.

Cancellation kit Audi A4/S4/A5/S5/RS4/RS5 B9

35020-31

Mounting Instructions

MOUNTING INSTRUCTIONS

⚠ Warning!

We strongly recommend to let an Öhlins dealer install this product.

⚠ Warning!

If you work with a lifted vehicle, make sure that it is safely supported to prevent it from tipping over.

Front axle

Change the front axle installed connectors against the supplied connector.

1



Dismantle the standard connector.

2

Open the lock from the plug connector and remove the standard wires out of the connector. Use a correct tool.

3

Insert the wire completed into the supplied connector until to the lock. The pinposition/ cable colour is not relevant. Subsequently lock the connector.

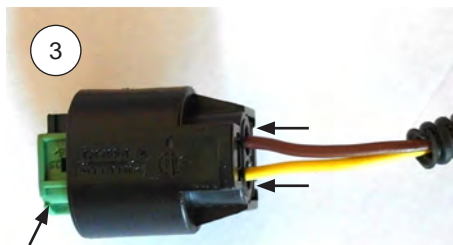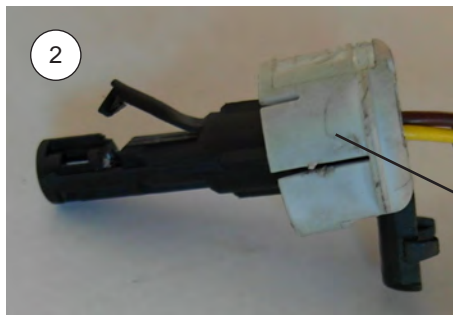

Lock the connector.



MOUNTING INSTRUCTIONS

⚠ Warning!

We strongly recommend to let an Öhlins dealer install this product.

⚠ Warning!

If you work with a lifted vehicle, make sure that it is safely supported to prevent it from tipping over.

Right front axle

1

Run the standard damper control wire to the supplied electronic component connector.

Insert the standard connector into the electronic component connector until it locks.

Fix the canceller and the cable with cable ties on the vehicle bar.



MOUNTING INSTRUCTIONS

⚠ Warning!

We strongly recommend to let an Öhlins dealer install this product.

⚠ Warning!

If you work with a lifted vehicle, make sure that it is safely supported to prevent it from tipping over.

Left front axle

1

Run the standard damper control wire to the supplied electronic component connector. Insert the standard connector into the electronic component connector until it locks. Fix the canceller and the cable with cable ties on the vehicle bar and on the cable wire harness.



MOUNTING INSTRUCTIONS

⚠ Warning!

We strongly recommend to let an Öhlins dealer install this product.

⚠ Warning!

If you work with a lifted vehicle, make sure that it is safely supported to prevent it from tipping over.

Left rear axle

1

Run the standard damper control wire to the supplied electronic component connector.

Insert the standard connector into the electronic component connector until it locks.

Fix the canceller and the cable with cable ties on the vehicle bar and on the cable wire harness.



MOUNTING INSTRUCTIONS

⚠ Warning!

We strongly recommend to let an Öhlins dealer install this product.

⚠ Warning!

If you work with a lifted vehicle, make sure that it is safely supported to prevent it from tipping over.

Right rear axle

1

Run the standard damper control wire to the supplied electronic component connector.

Insert the standard connector into the electronic component connector until it locks.

Fix the canceller and the wire with cable ties on the tank filler pipe.



MOUNTING INSTRUCTIONS

Öhlins products are subject to continuous improvement and development, therefore, although these instructions include the most up-to-date information available at the time of printing, minor updates may occur.

To find the latest information contact an Öhlins distributor. Please contact Öhlins if you have any questions regarding the contents in this document.

Part no. MI_35020-31_0
Issued 2021-02-01

© Öhlins Racing AB. All rights reserved. Any reprinting or unauthorized use without the written permission of Öhlins Racing AB is prohibited.

Öhlins Racing AB
Box 722
S-194 27 Upplands Väsby, Sweden
Phone +46 8 590 025 00
fax +46 8 590 025 80



www.ohlins.com