This document is confidential and must not be copied without our written permission, and the contents thereof must not be imparted to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted.

SS-EN ISO 8015, SS-EN ISO 14288 [A1]-TS0062 and other specified standards/documents. TS0014 Visual requirements level C applies if nothing else specified on drawing.

ISO 2768mK
[A1]-TS0061
(valid if stated on drawing)

Basic size (mm)	Dev. (mm)
-6	±0.1
(6)-30	±0.2
(30)-120	±0.3
(120)-400	±0.5
(400)-1000	±0.8

Ext. radius, chamfer (mm)	Dev. (mm)
-0.5	±0.1
(0.5)-3	±0.2
(3)-6	±0.5
(6)-	±1

Angular short length (mm)	Dev. (°)
-1	±3°
(1)-10	±1°
(10)-50	±0°30'
(50)-120	±0°20'
(120)-400	±0°10'
(400)-	±0°5

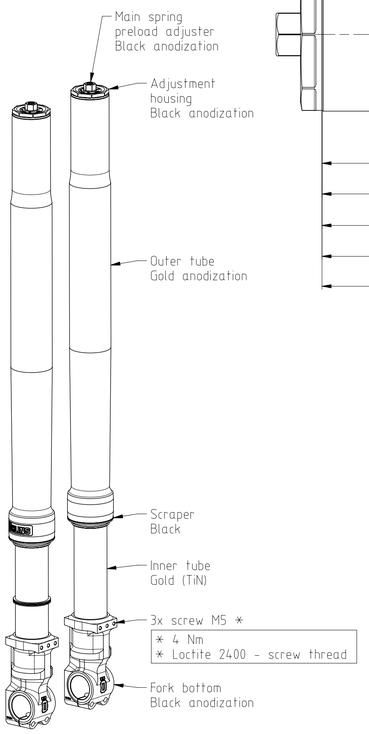

SCALE 1:4

Kit contents
1x front fork leg left hand side
1x front fork leg right hand side
4x 04757-05 screw MC6S M6x16 10.9
4x 04757-06 screw MC6S M8x16 10.9
4x 04757-09 screw MC6S M8x45 10.9

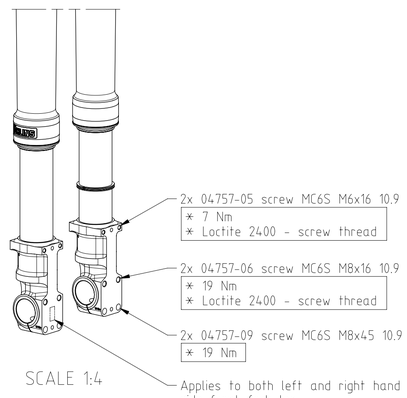

SCALE 1:4

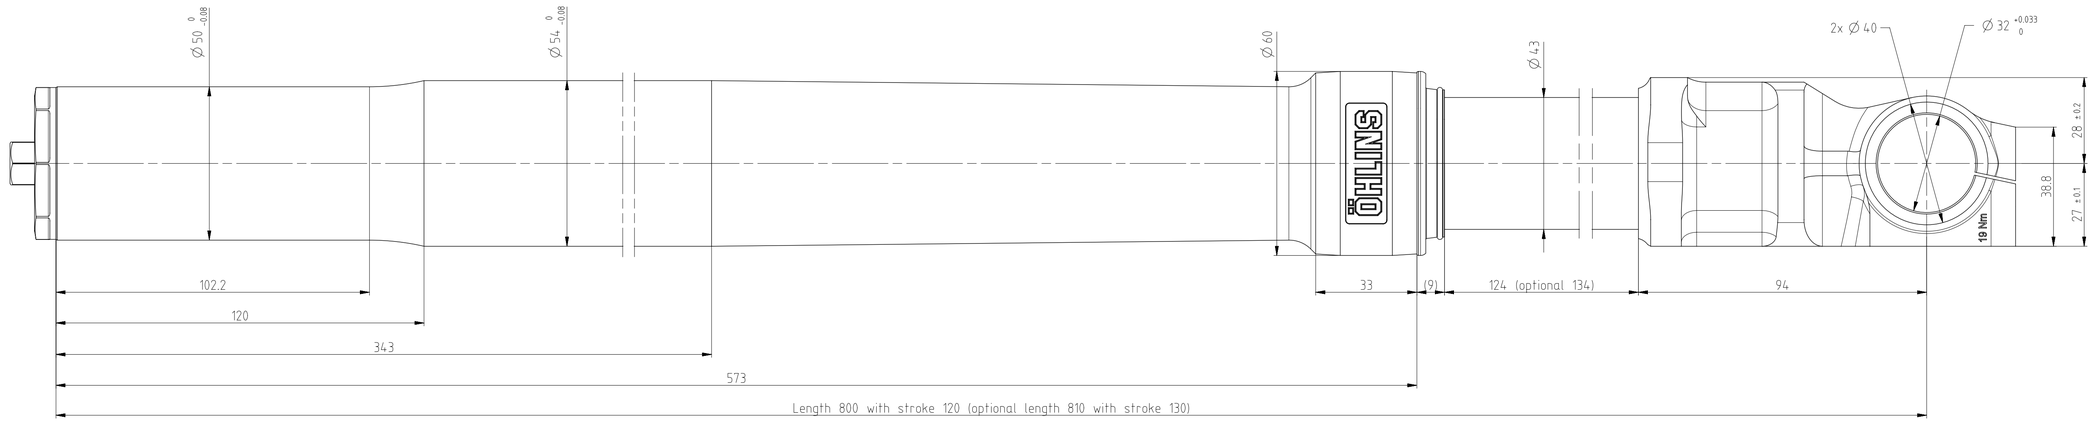

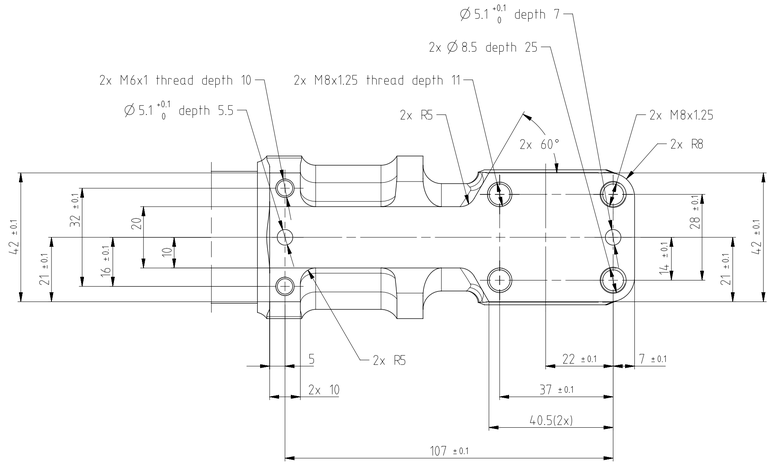

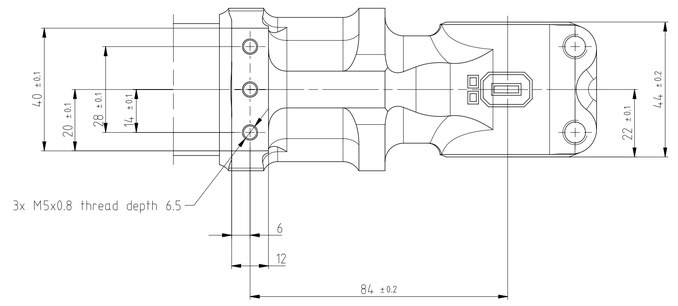

Loctite 2400 = 01791-25/26

* Carried out by the end user at installation

Rev.	Type of change	Sign.	Date	Rev.no
B	Marking note added	DN	191220	N/A
A	Drawing released for production	DN	190409	

Material	Heat treatment	Surface treatment

Date	Drawn	Approved	Format	Scale	Compare
2019-04-09	DN	TAN	A1	1:1	FG 324

Designation (swedish)

Designation (english)
Front fork universal

Drawing number
FF 520

Revision
B